

Deeply sculpted center blocks maximize off-road traction while retaining a quieter ride. Our flagship mud terrain, the Razr MT was engineered with know-how gained from our involvement in off-road racing.

The tire features a new off-road compound with new chemical fillers for maximum tear and chip resistance as well as tread life. The new pattern features deeply sculpted center blocks that maximize mud traction, while the RAZR MT's stone and mud ejectors improve self-cleaning performance and minimize rock retention.




## SPECIFICATIONS

Rim Size	Size	Service Description	SideWall Name	Overall Diameter	Section Width	MaxPSI	Max Load [lbs]	Approved Rim Width [in]	Ply Rating	P/C/LT	Radial/Bias	Tread Depth
16	315/75R16	127/124Q	RBL	34.8	12.8	65	3860			LT	RADIAL	19/32
18	37X12.50R18	123Q	RBL	36.9	13	50	3415			LT	RADIAL	20/32
18	295/65R18	127/124Q	RBL	33.5	12.1	80	3860			LT	RADIAL	19/32
20	295/65R20	129/126Q	RBL	35.7	12	80	4080			LT	RADIAL	19/32
17	35X13.50R17	121Q	RBL	34.8	14.2	65	3195			LT	RADIAL	20/32
20	37X12.50R20	128Q	RBL	36.8	12.5	80	3970			LT	RADIAL	20/32
18	295/70R18	129/126Q	RBL	34.6	12.3	80	4080			LT	RADIAL	19/32
20	295/60R20	126/123Q	RBL	34.4	12.2	80	3750			LT	RADIAL	19/32
20	37X13.50R20	127Q	RBL	36.9	14.3	65	3860			LT	RADIAL	20/32
16	265/70R16	121/118Q	RBL	30.9	11.1	80	3195			LT	RADIAL	18/32
16	285/75R16	126/123Q	RBL	33	11.8	80	3750			LT	RADIAL	18/32
18	285/65R18	125/122Q	RBL	32.8	11.5	80	3640			LT	RADIAL	19/32
16	245/75R16	120/116Q	RBL	30.4	10.2	80	3042			LT	RADIAL	18/32
17	305/70R17	121/118Q	RBL	34	12.8	65	3195			LT	RADIAL	19/32



20	35X12.50R20	125Q	RBL	34.8	12.9	80	3640			LT	RADIAL	20/32
22	37X13.50R22	123Q	RBL	36.8	13.9	65	3415			LT	RADIAL	20/32
17	40X13.50R17	121Q	RBL	39.9	14.3	35	3195			LT	RADIAL	20/32
17	35X12.50R17	121Q	RBL	34.8	13.2	65	3195			LT	RADIAL	20/32
24	40X15.50R24	128Q	RBL	40	15.5	80	3970			LT	RADIAL	20/32
20	295/55R20	123/120Q	RBL	33.4	12.1	80	3415			LT	RADIAL	19/32
15	32X11.50R15	113Q	RBL	31.8	11.9	50	2535			LT	RADIAL	20/32
17	315/70R17	121/118Q	RBL	34.6	13.3	50	3195			LT	RADIAL	20/32
20	33X12.50R20	119Q	RBL	32.8	12.5	80	3000			LT	RADIAL	20/32
20	37X13.50R20	128Q	RBL	36.8	14.3	80	3970			LT	RADIAL	20/32
17	37X12.50R17	124Q	RBL	36.8	13.1	65	3525			LT	RADIAL	20/32
15	33X10.50R15	114Q	RBL	32.8	11.1	50	2600			LT	RADIAL	19/32
17	265/70R17	121/118Q	RBL	31.8	10.8	80	3195			LT	RADIAL	20/32
18	35X12.50R18	128Q	RBL	34.8	13.2	80	3970			LT	RADIAL	20/32
18	35X12.50R18	123Q	RBL	34.8	13.2	65	3415			LT	RADIAL	20/32
18	275/65R18	123/120Q	RBL	32.5	11.1	80	3415			LT	RADIAL	18/32
15	33X12.50R15	108Q	RBL	32.9	13.3	35	2205			LT	RADIAL	20/32
15	35X12.50R15	113Q	RBL	34.8	13.5	35	2535			LT	RADIAL	20/32
22	37X12.50R22	127Q	RBL	36.8	12.5	80	3860			LT	RADIAL	20/32
17	285/70R17	121/118Q	RBL	33	11.8	80	3195			LT	RADIAL	18/32
18	285/75R18	129/126Q	RBL	35	11.8	80	4080			LT	RADIAL	18/32
20	38X13.50R20	128Q	RBL	37.7	14.3	65	3970			LT	RADIAL	20/32
20	40X13.50R20	128Q	RBL	39.8	14.1	65	3970			LT	RADIAL	20/32
16	265/75R16	123/120Q	RBL	31.9	11	80	3415			LT	RADIAL	18/32
18	275/70R18	125/122Q	RBL	33.5	11.3	80	3640			LT	RADIAL	18/32
20	275/65R20	126/123Q	RBL	34.5	11.2	80	3750			LT	RADIAL	18/32
17	37X13.50R17	121Q	RBL	36.8	13.6	50	3195			LT	RADIAL	20/32
18	33X12.50R18	122Q	RBL	32.9	12.8	80	3305			LT	RADIAL	20/32
22	35X12.50R22	121Q	RBL	34.7	12.5	80	3195			LT	RADIAL	20/32
17	295/70R17	121/118Q	RBL	33.5	12.3	80	3195			LT	RADIAL	19/32
20	35X12.50R20	121Q	RBL	34.8	13	65	3195			LT	RADIAL	20/32

Overall Width (+/- 2%) Overall Diameter (+/- 1.5%) Static radius (+/- 2%) Circumference (+/- 2.5%)

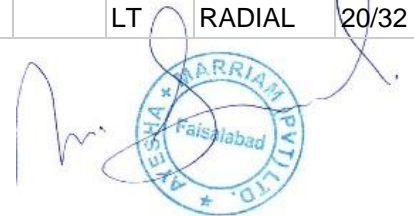

for Maxxis Tyres | PK  
**MAXXIS**<sup>®</sup>  
CEO | Maxxis Pakistan

M.   
AKESHA \* HARRIAN PVT. LTD. \*  
Faisalabad